


Technical datasheet

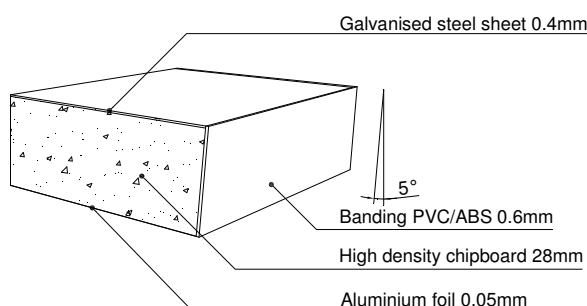

28 HAS-D620

Tested according the European norm 12825

General characteristics

Measurements	:	600 x 600 mm
Weight	:	+/- 7,50 kg
Core	:	28 mm chipboard - density 620 kg/m ³ - E1
Bottom side	:	Aluminium foil 0,05 mm
Upper side	:	Galvanised steel 0,4 mm
Edge banding	:	PVC/ABS 0,6 mm

System characteristics

Class of element	:	1
Ultimate load	:	≥ 4 kN
Safety factor	:	2
Point load	:	2 kN
Class of deflection (max 4 mm deflection by 2 kN)	:	C
Divided load per m ² (Theoretical value)	:	10 - 15 kN/m ²

Elektrical resistance

$\geq 10^9 < 10^{10} \Omega$

Other values are possible by the use of conductive banding and glue.

Jansen Products nv

Fabrickstraat 4
3670 Meeuwen
BELGIUM

Tel : +32 11 79 33 00
Fax: +32 11 79 33 01
info@jansenproducts.be
www.groupjansen.com