


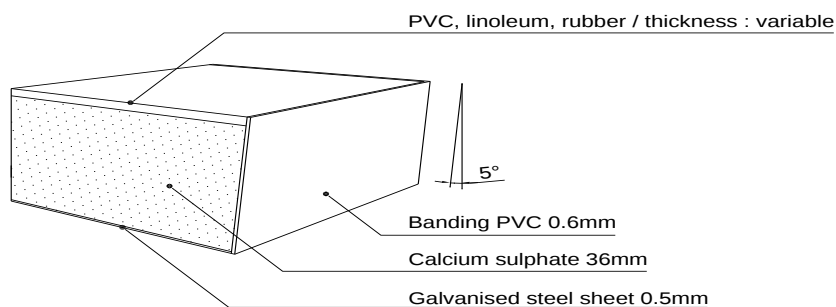

36 GSB-P

Tested according EN 12825

General characteristics

Measurements	600 x 600 mm
Weight	+/- 23,2 kg (without covering)
Core	36 mm calcium sulphate Knauf - density > 1500 kg/m ³
Bottom side	galvanised steel 0,5 mm
Top side	PVC, linoleum, rubber
Edge banding	PVC 0,6 mm

System characteristics

Class of element	3
Ultimate load	>=8kN
Safety factor	2
Point load	4kN
Class of deflection (max. 2,5 mm deflection by 4kN)	A
Divided load per m ² (theoretical value)	20kN-25kN / m ²

Fire characteristics

Fire resistance	F60 according DIN 4102-2
Fire reaction	class A2 according DIN 4102-1

Electrical characteristics

Electrical resistance	>10 ⁷ Ohm
Other values are possible when using conductive edge banding and conductive glue.	

Jansen Products NV
Fabriekstraat 4
3670 Meeuwen
BELGIUM

Tel : +32 11 79 33 00
Fax : +32 11 79 33 01
Info@jansenproducts.be
www.groupjansen.com

 **JANSEN**
products