


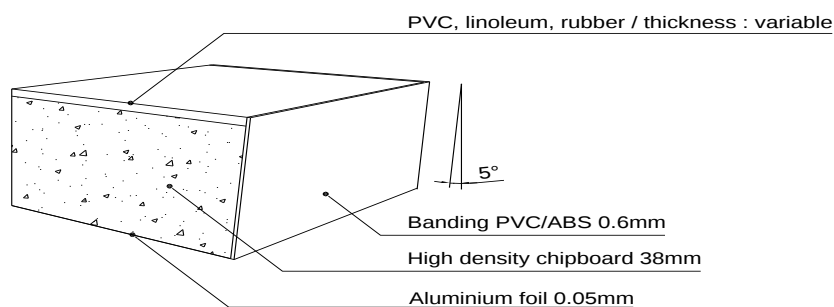

38 HAB-P

Tested according EN 12825

General characteristics

Measurements	600 x 600 mm
Weight	+/- 10,2 kg (without covering)
Core	38 mm chipboard - density 720 kg/m ³ - E1
Bottom side	aluminium foil 0,05 mm
Top side	PVC, linoleum, rubber
Edge banding	PVC/ABS 0,6 mm

System characteristics

Class of element	1
Ultimate load	>=4kN
Safety factor	2
Point load	2kN
Class of deflection (max. 2,5 mm deflection by 2kN)	A
Divided load per m ² (theoretical value)	10kN-15kN / m ²

Fire characteristics

Fire resistance	F30 according DIN 4102-2/REI30 according EN13501-2
Fire reaction	class B2 according DIN 4102-1

Electrical characteristics

Electrical resistance	>=10 ⁹ Ohm
Other values are possible when using conductive edge banding and conductive glue.	

Complete certificates on request

Jansen Products NV
Fabriekstraat 4
3670 Meeuwen
BELGIUM

Tel : +32 11 79 33 00
Fax : +32 11 79 33 01
Info@jansenproducts.be
www.groupjansen.com

 **JANSEN**
products